


**PRODUCT DATA SHEET  
Q.D. ANTI CORROSIVE ENAMEL**

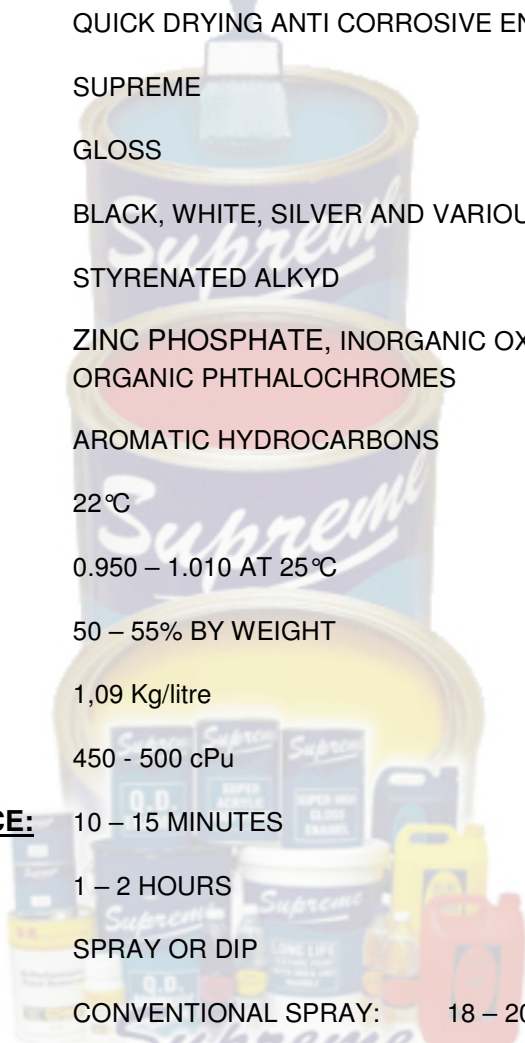

<b><u>PRODUCT NAME:</u></b>	QUICK DRYING ANTI CORROSIVE ENAMEL
<b><u>PRODUCT BRAND:</u></b>	SUPREME
<b><u>FINISH:</u></b>	GLOSS
<b><u>COLOURS:</u></b>	BLACK, WHITE, SILVER AND VARIOUS COLOURS
<b><u>VEHICLE TYPE:</u></b>	STYRENATED ALKYD
<b><u>PIGMENT TYPE:</u></b>	ZINC PHOSPHATE, INORGANIC OXIDES, CHROMATES AND ORGANIC PHTHALOCHROMES
<b><u>SOLVENT TYPE:</u></b>	AROMATIC HYDROCARBONS
<b><u>FLASH POINT MIN:</u></b>	22°C
<b><u>SPECIFIC GRAVITY:</u></b>	0.950 – 1.010 AT 25°C
<b><u>SOLIDS CONTENT:</u></b>	50 – 55% BY WEIGHT
<b><u>DENSITY:</u></b>	1,09 Kg/litre
<b><u>VISCOSITY AT 25°C:</u></b>	450 - 500 cPu
<b><u>DRYING TIME:</u></b>	<b><u>SURFACE:</u></b> 10 – 15 MINUTES
	<b><u>HARD:</u></b> 1 – 2 HOURS
<b><u>APPLICATION METHOD:</u></b>	SPRAY OR DIP
<b><u>APPLICATION VISCOSITY:</u></b>	CONVENTIONAL SPRAY: 18 – 20" FC4
<b><u>RECOMMENDED THINNER:</u></b>	Q.D ENAMEL THINNERS

*Supreme*  
PAINT

## **B & R PRODUCTS (PTY) LTD**

19 Beryllium Rd, Alrode Ext 7, Alberton  
Tel: 011 864-1301 /1302 /1036 /1393  
Fax: 027 11 864-1390  
P.O. Box 1633, Randburg, 2125, South Africa

Reg. No. 80/09849/07  
Email: [bandr@icon.co.za](mailto:bandr@icon.co.za)  
Web: [www.bandr.co.za](http://www.bandr.co.za)

<b><u>FINENESS OF GRIND:</u></b>	5 MICRONS
<b><u>GLOSS:</u></b>	85% ON 60°
<b><u>HEAT RESISTANCE:</u></b>	250 – 300 DEGREES C
<b><u>COVERAGE AT DFT 40 MICRONS:</u></b>	8 SQUARE METRES PER LITRE
<b><u>RECOMMENDED DRY FILM</u></b>	
<b><u>THICKNESS:</u></b>	40 MICRONS

### **DESCRIPTION & GENERAL USE:**

A quick drying general purpose gloss industrial enamel based on a short oil air drying alkyd with anti corrosive additives, For use on steel or alloys as a primer and top coat all in one. All surfaces must be clean and dry.

All equipment must be cleaned immediately after use with thinners.



Director: B. J. Rodd